

Whitehead, P., Bussi, G., Hossain, M. A., Dolk, M., Das, P., Comber, S., Peters, R., Charles, K. J., Hope, R. and Hossain, M. S. (2018) Restoring water quality in the polluted Turag-Tongi-Balu river system, Dhaka: Modelling nutrient and total coliform intervention strategies. *Science of the Total Environment*, 631-2, pp. 223-232.

There may be differences between this version and the published version. You are advised to consult the publisher's version if you wish to cite from it.

<http://eprints.gla.ac.uk/223231/>

Deposited on: 9 October 2020

RESTORING WATER QUALITY IN THE POLLUTED TURAG-TONGI-BALU RIVER SYSTEM, DHAKA: MODELLING NUTRIENT AND TOTAL COLIFORM INTERVENTION STRATEGIES

Paul Whitehead¹, Gianbattista Bussi¹, Mohammed Abed Hossain², Michaela Dolk¹, Partho Das², Sean Comber⁴, Rebecca Peters¹, Katrina J. Charles¹, Rob Hope¹ and Md. Sarwar Hossain³

¹ School of Geography and the Environment, University of Oxford, Oxford, OX1 3QY, UK

² Institute of Water and Flood Management (IWFM), Bangladesh University of Engineering and Technology (BUET) Dhaka 1000, Bangladesh

³ Institute of Geography, University of Bern, CH-3012 Bern, Switzerland

⁴ Department of Environmental Sciences, Plymouth University, Drake Circus, Plymouth, PL4 8AA, UK

Corresponding Author Email: paul.whitehead@ouce.ox.ac.uk; Tel: +44 7972 805 094

ABSTRACT

River water quality in rapidly urbanising Asian cities threatens to damage the resource base on which human health, economic growth and poverty reduction all depend. Dhaka reflects the challenges and opportunities for balancing these dynamic and complex trade-offs if water security goals can be achieved through effective policy interventions. There is a serious problem of water pollution in central Dhaka, in the Turag-Tongi-Balu River System in Bangladesh with the river system being one of the most polluted in the world at the moment. A baseline survey of water chemistry and Total Coliform has been undertaken and shows Dissolved Oxygen close to zero in the dry season, high organic loading together with extreme levels of ammonia and Total Coliform in the water. Models have been applied to assess hydrochemical processes in the river and evaluate alternative strategies for policy and the management of the pollution issues. In particular models of flow, nitrate, ammonia and indicator Total Coliform (Total Coliforms) are applied to simulate water quality in the river system. Various scenarios are explored to clean up the river system, including flow augmentation and improved effluent treatment. The model results indicate that improved effluent treatment is likely to have a more significant impact on reducing Ammonia-N and Total Coliforms than flow augmentation, but a combined strategy would greatly reduce the pollution problems in the Turag-Tongi-Balu River System.

KEY WORDS: Pollution Control, Bangladesh, Turag River, Balu River, Total Coliform, Nutrients, Modelling Water Quality, Water Security, Poverty

INTRODUCTION

Environmental pollution in large rapidly developing delta cities is a major problem responsible for over 12.6 million deaths annually according to the World Health Organisation and UNICEF (Prüss-Üstün and Corvalán, 2006). Deltas have some of the highest population densities in the world with often poor and vulnerable residents (Nicholls et al, 2016). The presence of high population numbers, unsanitary conditions, poorly regulated industrial discharges and untreated domestic effluents has ensured that many urbanised delta rivers are highly polluted. They also pose a significant health threat to people using the rivers, groundwaters and associated water supply systems (Pimentel et al., 2007, Vörösmarty et al., 2010). Similar to urban rivers systems in other rapidly industrializing developing countries, the rivers of Dhaka City, Bangladesh, are heavily impacted by the scale and intensity of economic growth. While Greater Dhaka is a major engine of growth for Bangladesh, representing 40% of GDP production, high levels of pollution, over-abstraction of ground water, and inefficient use means that the Turag -Tongi - Balu river system in central Dhaka (Figures 1 and 2) receives a huge load of domestic and industrial effluent. New industrial developments and townships enhance these pollution loads with devastating impacts on river water quality. In this paper we assess the impact of nutrient and Total Coliform pollution in the Turag-Tongi-Balu River system and consider the mass balance of chemical constituents in the river system.

We have utilised a dynamic process based flow and water quality model INCA (Integrated Catchment Model, Whitehead et al, 1998 a, b, 2016, Wade et al 2002 a, b, c) to simulate the behaviour of the catchment and river system. Water quality modelling is a useful technique to improve our understanding of the spatial and temporal dynamics of nutrients and Total Coliform in a river system, and can be used to explore the potential effects of different management and hydrological change scenarios on river water dynamics. Two management strategies have been considered in this study, namely, the introduction of effluent clean up technologies for key discharges along the river and the alteration of water flows in the upper Turag so as to increase the flows of water in low flow conditions. This study presents the first integrated flow and water quality model of pollution risks in urban Dhaka and aims to guide and support government efforts to systematically regulate pollution in the Dhaka region. The designation of rivers in Greater Dhaka as Ecologically Critical Areas (ECAs) by the Ministry of Environment and Forestry creates a foundation for future restoration activities (MoEF, 2010).

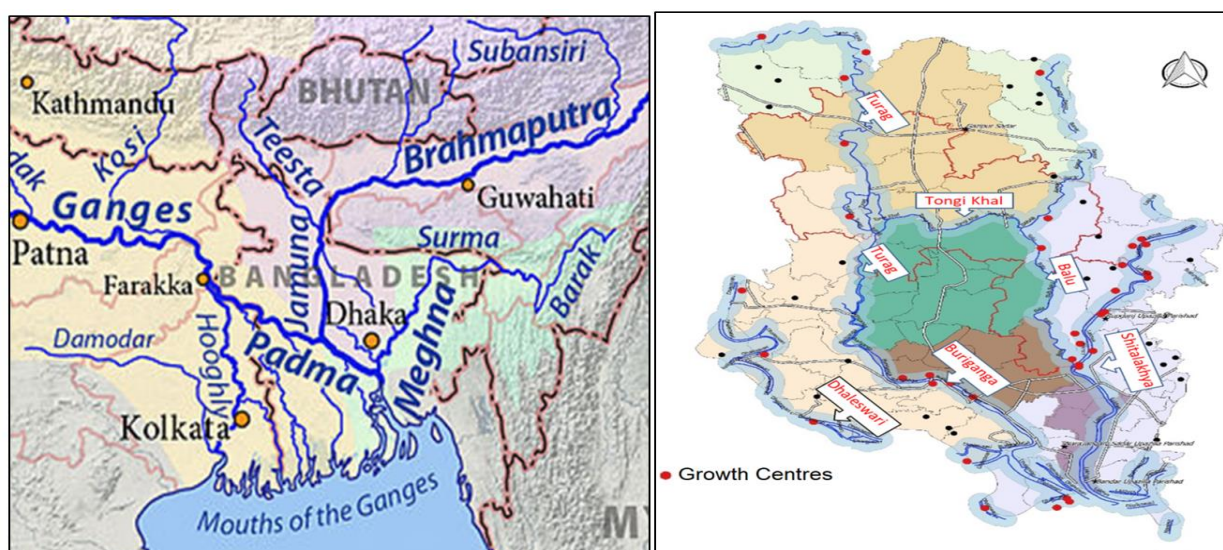


Figure 1 Maps showing Ganges, Padma, Brahmaputra and Meghna Rivers feeding into the Bangladesh Delta (left) and details of the Turag- Tongi - Balu River Systems around Dhaka City (green/brown Zone) on the right hand map. Red dots on right map shows areas of rapid growth and development in Dhaka

THE TURAG-TONGI-BALU CATCHMENT SYSTEM

The city of Dhaka, capital of Bangladesh, is located in the centre of the country, north of the confluence of the River Padma (combined Ganga and Brahmaputra) and Meghna. The Turag-Tongi-Balu Rivers are part of a complex peripheral system of rivers surrounding Dhaka, as shown in Figure 1. Seasonal flow variability in this river system is related to the region's climate, characterised by a hot pre-monsoon summer season (March to May), a rainy monsoon season (June to September), a post-monsoon autumn season (October to November), and a dry winter season (December to February) (WARPO, 2004, Shahid, 2010). The Turag River is fed by runoff coming from a predominantly agricultural area located upstream, as well as from other rivers such as the Bangshi River and the Brahmaputra River, and flows into the Buriganga River, in the South of Dhaka. Land use is changing rapidly in the peripheries of Dhaka, with multi-spectral satellite data showing rapid conversion from agricultural cultivated land to urban land uses along Tongi Khal over the past few decades ([Dewan and Yamaguchi, 2009](#), Dewan et al., 2012). Improved sanitation coverage in this new urban area is currently low, with the drainage system used as a combined sewerage system in a large portion of the area, presenting a source of microbial contamination of the river system. Precise estimates of effluent loads from various sources along the river are unavailable, in part due to the rapid pace of change which means that data is quickly outdated. Dhaka is one of the most densely populated cities in the world, home to approximately sixteen million people, of which less than 25% are served by sewage treatment facilities (Islam et al., 2015). In the last twenty years, a convergence of unregulated industrial expansion, rural-to-city migration, overloaded infrastructure, unclear institutional responsibility for water quality management and ineffective enforcement of environmental regulations have all taken their toll on surface water quality. Though there are plans for a number of sewage treatment plants by 2025, there is no sewage treatment plant serving the northern part of Dhaka at the moment which is of concern. Whilst many industries claim to have effluent treatment system, there is no clear evidence that these operate in any systematic manner. Almost all the waste from humans, industry, and millions of farm animals, along with tonnes of pesticides and fertilizers, make their way into Dhaka's surface water untreated, and a percentage of these wastes infiltrate to the groundwater. As a result, pollutant levels in the groundwater are increasing, as are those in many sections of the rivers and canals in the city and surrounding areas and pollution increases to alarming levels in the dry season (MoEF, 2010). Sayed et al. (2015) found significant changes in the major land use patterns of Dhaka city using remote sensing and reported that industrial expansion in Dhaka city has increased approximately 20% between 2004 and 2010 and brickfields also increased 5% within the same period. Brickfields are also one of the major sources of water and air pollution in Dhaka city. The sewerage and sanitation network of Dhaka city covers only 25% of the total urban area. In the absence of an appropriate waste management system, over 50% of municipal waste is disposed into the water bodies of Dhaka city (MoEF, 2010). Therefore, it is a considerable challenge to identify the location of the pollution sources around the Turag-Tongi-Balu River System (Sabit and Ali 2015, MoEF, 2010).

113 WATER QUALITY IN THE RIVER SYSTEM

114 Given the extensive sources of pollution in the Turag-Tongi-Balu system, it is not surprising
115 that the observed concentration data highlights the poor water quality. A comprehensive
116 sampling programme has been conducted by BUET (Bangladesh University of Technology)
117 and Figure 2 shows the spread of sampling sites along the river system plus the sample dates.
118 All the samples and measurements were taken from the middle of river at the designated
119 sample points decided from literature, satellite imagery and a number of reconnaissance visits
120 to the river system. Some of the parameters were analysed in-situ with HACH HQ40d multi-
121 parameter meter which can measure pH, dissolved oxygen (DO), oxidation-reduction potential
122 (ORP), electrical conductivity (EC) and Total Dissolved Solids (TDS). Measurements were
123 made and samples collected from a depth of 50 cm from the surface to avoid wave turbulence
124 and debris. Samples of 500 ml were collected using an automatic wastewater sampler (Global
125 Water WS 755) and stored in pre-acid washed Teflon coated reagent grade plastic bottles.
126 Bottles were capped following standard EPA guidelines to remove air and placed in ice boxes
127 to limit biological activities. Filtered samples were used for measuring chemical oxygen
128 demand (COD), nitrate, ammonia and phosphate using spectrophotometric methods. For this
129 a HACH DR-6000 spectrophotometer was used following HACH pre-calibrated standard
130 methods. Microbial analysis included measurements of Total Coliforms (TC) and E.coli
131 cfu/100ml undertaken using standard methods. Total coliforms include bacteria that are found
132 in the soil, in water that has been influenced by surface water, and in human or animal waste.
133 Faecal coliforms are the group of the total coliforms that are considered to be present
134 specifically in the gut and faeces of warm-blooded animals. For each sample, 100 ml were
135 filtered using 0.45 µm cellulose nitrate filters, which were attached to adsorbent pads soaked
136 in m-ColiBlue24 broth in a sterilised petri dish, and the assembly was incubated at 35°C for
137 24 hours. The colonies on the filters were counted using a digital colony counter after the
138 incubation period. The dilution ranged from 1000 to 10000 for samples where the dilution was
139 decided from samples from reconnaissance visits and literature. Figure 3 shows plots of the
140 profiles of water quality along the main river system with data means at different reaches for
141 Nitrate-N, COD, DO, Ammonia-N and TC, as an indicator of Total Coliform. The Nitrate-N
142 shows quite high concentrations higher up in the catchment reflecting agricultural
143 development in the upper reaches of the Turag, but the concentration falls as the Nitrate-N
144 moves down the river system, suggesting both dilution and denitrification. The COD levels are
145 very high indicating significant effluent and industrial discharges. There is a major difference
146 between the wet and dry periods, with much higher COD in the dry season. This is due to the
147 low flows and hence reduced dilution of effluents and discharges. The high COD, and by
148 association, high BOD, also causes extremely low DO levels, as shown in Figure 3. DO is
149 close to zero in certain reaches in the low flow period which creates anoxic conditions, leading
150 to many pollution problems such as the release of noxious gases such as hydrogen sulphide,
151 and dissolution of metals from the sediments into the water column. These can cause serious
152 health problems. The Ammonia and Nitrate –N concentrations also become very high with
153 Ammonia-N reaching 16 mg/l. Nitrate declines down the river system suggesting higher
154 agricultural sources of nitrate and instream denitrification occurs plus dilution of the upstream
155 pollution. The Ammonia-N also creates low oxygen conditions as Ammonia-N nitrifies to nitrate
156 and utilises oxygen for the river water. Plus there will be a large release of nitrous oxide gas
157 (a greenhouse gas) from denitrification processes. Thus the Turag-Tongi-Balu system is
158 highly polluted and there is a need to make a major effort to clean up the river system and
159 restore it to reasonable health.

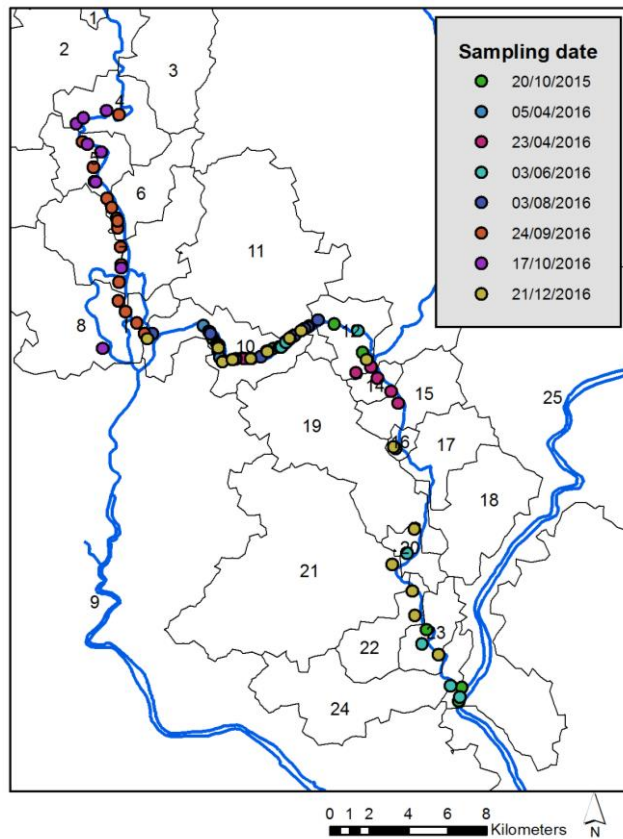


Figure 2 The sub catchment numbered locations of sampling sites along the Turag-Tongi-Balu River system and the dates of sampling.

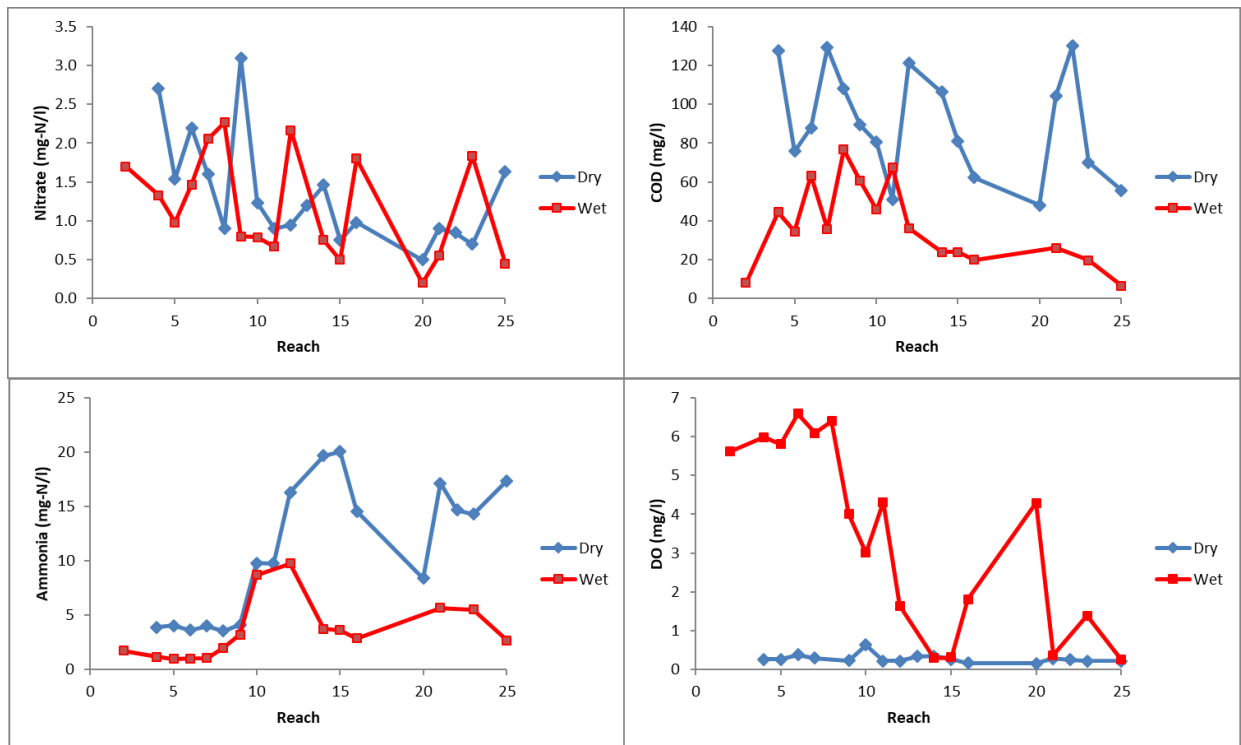


Figure 3 Mean Water Quality Concentrations along the Turag-Tongi-Balu System

THE INCA (INTEGRATED CATCHMENT) FLOW AND QUALITY MODEL

There are relatively few models of whole catchments that incorporate the soil and groundwater components as well as river channel dynamics, despite the fact that many problems are caused by nonpoint source or diffuse pollution. Where such models do exist they are often driven by overly complex hydrological models. In an attempt to develop a process-based water quality model with hydrology and water quality modeled at the same level of complexity, a model called the Integrated Catchments Model (INCA) has been developed. The INCA model simulates the main processes related with rainfall-runoff transformation and the cycle and fate of several compounds, such as nitrate, Ammonia-N, Total Coliform, metals and phosphorus (Whitehead et al., 1998 a,b, 2016, Wade et al., 2002 a, b, c, Whitehead et al, 2015, Jin et al 2015). In terms of nitrogen, the modeled processes include mineralization, nitrification, denitrification, immobilization, plant uptake, and nitrogen fixation, as indicated in Figure 4. Both surface soil zones and groundwater zones are simulated together with leaching of water into the river system (Figure 4). Sources of nitrogen can be from atmospheric deposition (i.e. from local or remote sources such as power stations, industry, or vehicles), from point sources such as sewage discharges, or from distributed sources such as agricultural fertilizers or natural organic sources of nitrogen. The INCA-Total Coliform model is also a process-based model and simulates Total Coliform stores in soils, groundwater, sediments, and river water (Whitehead et al., 2016). The Total Coliform model accounts for both diffuse Total Coliform sources, such as those from agricultural areas, as well as point sources, including sewage treatment works and industrial sources (see Figure 5). The model simulates a range of processes governing microbial transport, growth and die-off, and parameters may be varied at a sub-catchment scale to enable a spatially variable representation of key processes. A full description of the Total Coliform model and applications in England, Wales and Finland are given by Whitehead et al. (2016), Bussi et al (2017), and Rankinen et al (2016).

Model sensitivity, uncertainty analysis and limitations

There are always issues concerned with model uncertainty and model limitations in any flow and water quality modelling study. Models are a simplification of reality and allow an approximation to any system to be evaluated (Whitehead et al, 1998). The fact that the system is dynamic and that chemical processes are kinetic in nature and interact with the hydrology makes modelling a very complex process. There have been extensive studies of uncertainty using the INCA models with techniques such as generalized sensitivity analysis (Spear and Hornberger, 1980, Hornberger and Spear, 1980) used extensively to test INCA model uncertainty (Wade et al 2002 a, b, c, Rankinen et al 2016) to evaluate both parametric uncertainty in the INCA Model and uncertainty in the data used to drive the model. For example, Rankinen 2016 found that the INCA-Pathogen model performance was sensitive to the parameters defining light induced microbial decay in river water and in the soil compartment as well. There are limitations in any water quality modelling study because of all the complexities. In this study a key limitation is the lack of frequent water quality data to allow a full calibration and validation of the model and even the flow data is fairly limited. So there will be uncertainty in any results from such a study. However, this work is regarded as a

first step with more sampling and chemical analysis needed in order to give increased confidence in the models.

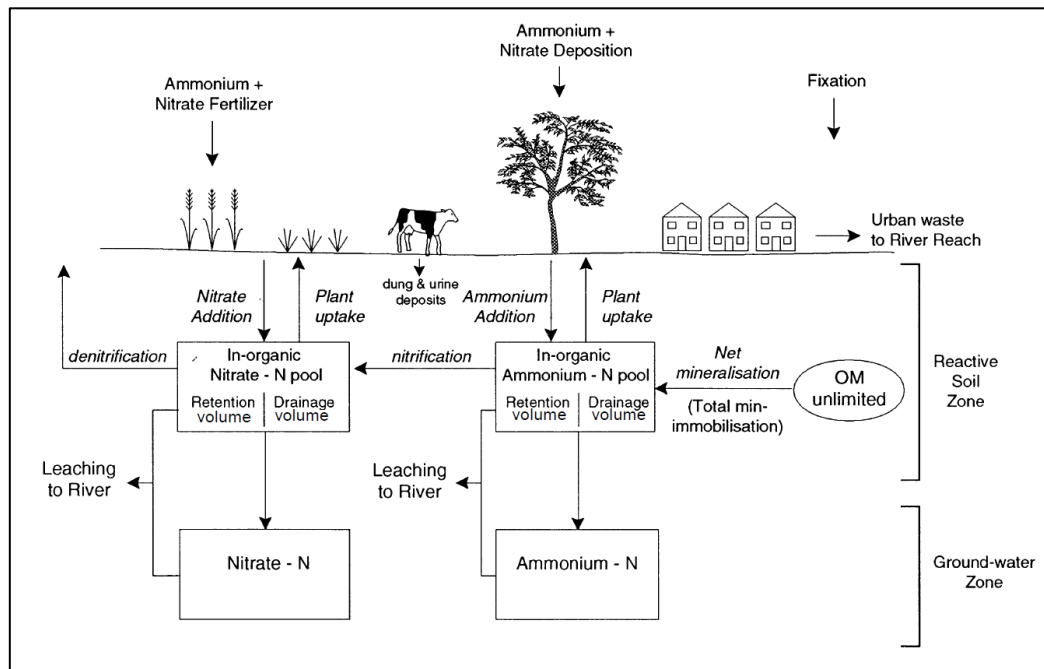


Figure 4 The key process in the land component of nitrogen cycle

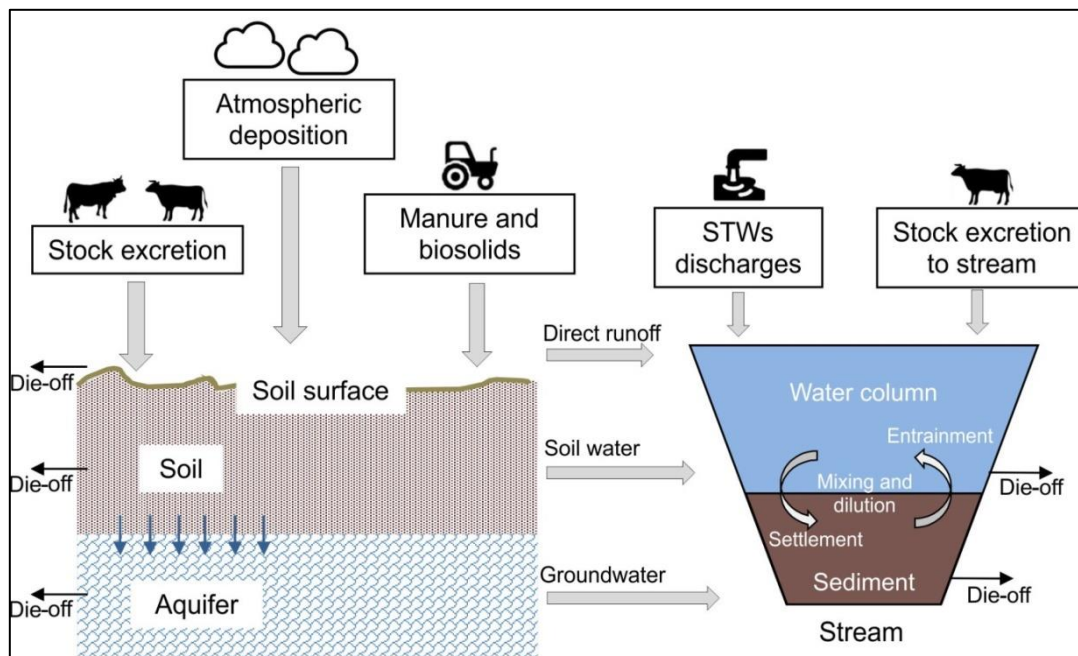


Figure 5 Schematic representing the sources, transport mechanisms and stores of Total Coliform in the environment

APPLICATION OF INCA TO TURAG-TONGI-BALU SYSTEM

The INCA N and INCA TC model requires daily time series of precipitation, hydrologically effective rainfall (HER), temperature and soil moisture deficit (SMD), as can be seen in Figure 6. Observational data are available from in situ weather stations and also from satellite measurements and these have been integrated into observational datasets which cover the region as part of the Aphrodite online data system (Yatagai et al, 2012, Whitehead et al. 2015). Observations of flows, Total Coliform numbers, nitrate-N and Ammonia-N concentrations are required in order to adjust the INCA model parameters in order to calibrate and validate the model. River flows and water chemistry data have been used to compare observed and simulated values for calibration and validation. Flow data are available at the Mirpur Bridge on the Turag River for the high flow season (June-October).

Spatially distributed information is required in order to estimate several of the INCA model parameters. Some of them are detailed as follows.

- Digital elevation model. The elevation information was obtained from the Shuttle Radar Topography Mission (SRTM) (<https://www2.jpl.nasa.gov/srtm/>). SRTM is an international research effort to obtain digital elevation models on a near-global scale from 56° S to 60° N. The DEM scale is 90 m.
- Land use/land cover. The land use information was obtained from the GlobCover Portal. GlobCover is an ESA (European Space Agency) initiative whose aim is to develop a service capable of delivering global composites and land cover maps using as input observations from the 300m MERIS sensor on board the ENVISAT satellite mission (http://due.esrin.esa.int/page_globcover.php).
- Atmospheric deposition. This information was obtained from the global map of atmospheric nitrogen deposition (Dentener, 2006), distributed by the Distributed Active Archive Centre for Biogeochemical Dynamics of the Oak Ridge National Laboratory (DAAC ORNL). The average value is 29 kg ha⁻¹ yr⁻¹. (https://daac.ornl.gov/cgi-bin/dsviewer.pl?ds_id=830)
- Population map. This map may be useful to define the flow and nutrient concentrations of treated wastewater discharges, in case direct measurement is not available. This was obtained from the Gridded Population of the World (GPW) of the Socioeconomic Data and Applications Centre (SEDAC): (<http://sedac.ciesin.columbia.edu/data/collection/gpw-v3>)

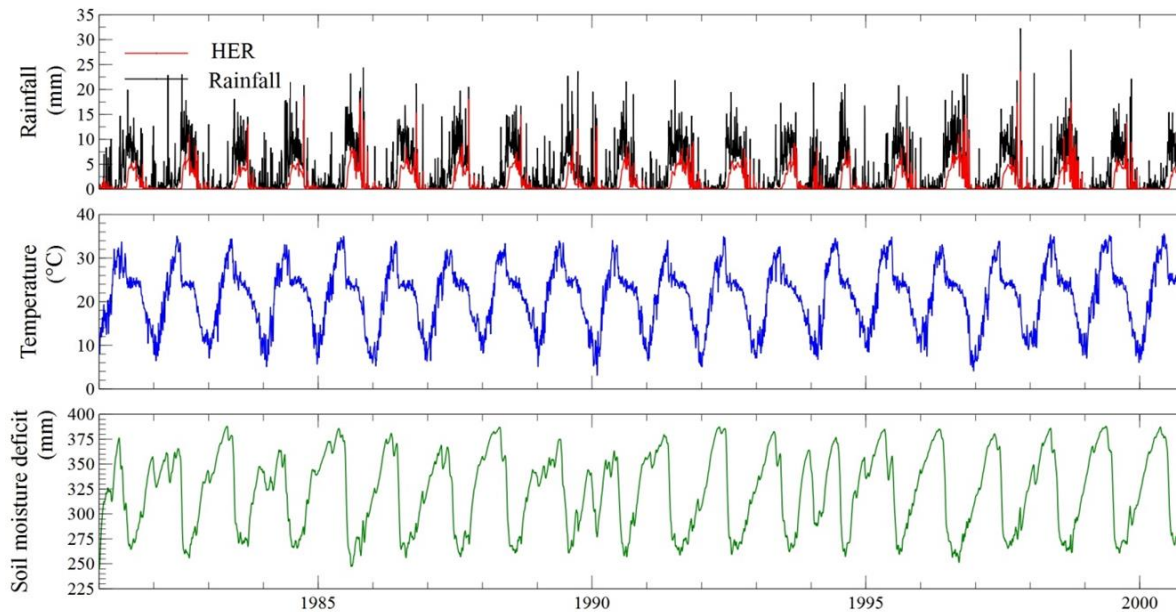


Figure 6 INCA model inputs of daily rainfall, hydrologically effective rainfall (HER), temperature and soil moisture deficit (SMD)

Model set-up- Sub-catchment and Reach Structure

The reach structure of the Turag-Tongi-Balu system is complex, with the Tongi Khal connecting the Turag and Balu Rivers, as shown in Figure 7. This figure also shows the upper reaches of the Turag and the linkage to the Brahmaputra, as well as the details of the lower reaches. The river system has been divided up into 24 reaches as indicated in Table 1, which gives the reach lengths and the sub catchment areas associated with each reach. In terms of hydrology the system is complicated by the overland flows from the Brahmaputra during flood conditions (Figure 7). These Brahmaputra overland flows feed into the upper Turag and need to be accounted for in any flow simulation so that the correct flows are simulated in the lower reaches. This also ensures the correct dilution factors are computed in the INCA model and are applied to effluent discharges and diffuse runoff pollution in all reaches. The extent of the connection between the Brahmaputra and the upstream Turag is difficult to estimate, as it is not measured. However, we have estimated the extra flows by comparing the observed flows in Reach 8 with the simulated natural catchment flows. The difference then gives an estimate of the Brahmaputra overland flows entering the upper Turag. This extra flow can then be added back into the model as the additional flood flows into the upper Turag. As shown in Figure 8, we generate model simulated flows that match the limited wet season observation data. The simulated Nitrate-N and Ammonia-N (Figure 8) indicate low concentrations in monsoon periods when flows are high and the dilution is large, but higher concentrations in the low flow periods when little dilution occurs.

Due to a lack of data, effluent discharges for each reach were estimated by running the model in a “reverse-mode” and comparing the pattern of simulated and observed water quality along the river. In the case of the Total Coliform model, observations for Total Coliforms were sourced from the water quality surveys, which measured water quality at numerous locations along the Turag-Tongi-Balu River system (Figure 2) and over a range of dates, as shown in Figure 2. A similar method of running the model in a “reverse-mode” to estimate the

contaminant discharges was used in a study of perfluoroalkyl substances by Sharma et al. (2016) in a similarly data-scarce context. Effluent discharges were estimated separately for the wet (May to October) and dry (November to April) seasons due to the substantially higher runoff (and hence higher effluent loads) during the wet season. The Total Coliform concentration of the effluents was calibrated by comparing the distribution of simulated values to observed data. Model process parameters such as the Total Coliform die-off rate, growth rate and light decay rate were based on values from the literature, as shown on Table 2 (Whitehead et al., 2016), and this was necessary because of the lack of any process rate data for the triver system. As shown in Figure 9 and Figure 10 the profile down the river system from the model compares well with the observed profiles of mean TC and mean Ammonia-N, although ammonia shows some spikes probably due to the sampling site being immediately downstream of an effluent discharge. The model fits to the data along the river gives R^2 of 0.79 for ammonia and 0.76 for Total Coliform, so this gives some confidence that the model is representing the water quality in the river system.

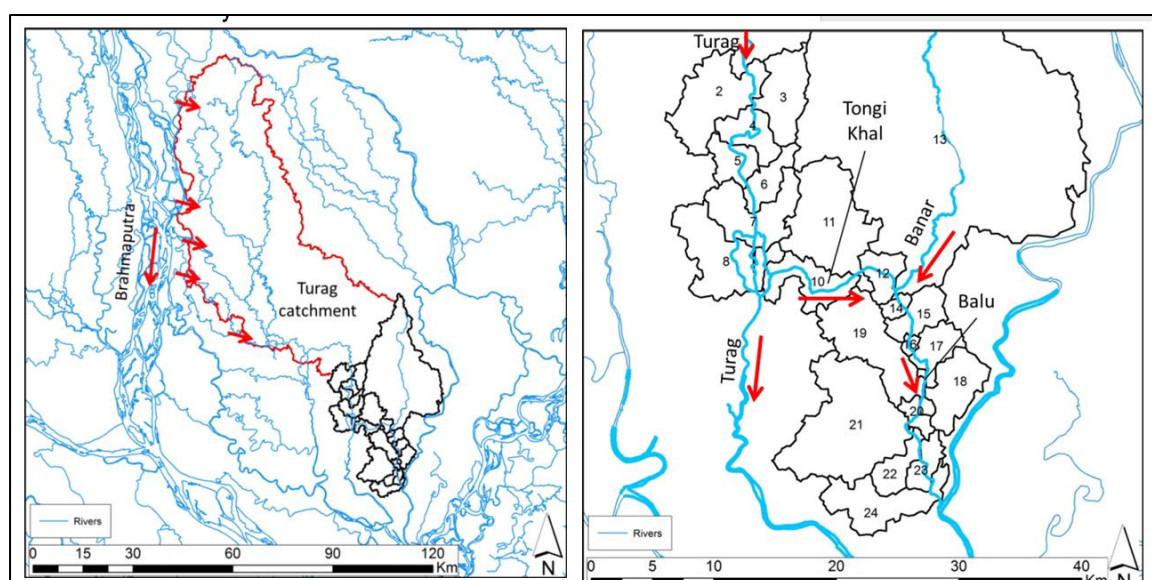


Figure 7 Reaches and subcatchments of the Turag-Tongi-Balu River System around Dhaka. Left map shows the upper Turag Sub- catchment 1 (in red) and the flood flows (in red) moving across to the Turag from the Brahmaputra. The right map shows the reach boundaries in the middle and lower reaches of the Turag-Tongi-Balu System from subcatchment 2 to 24 (red arrows indicate directions of flow in the wet season).

Table 1 Turag-Tongi-Balu River System reaches, sub-catchments and land use

Reach number	Reach length (m)	Catchment area (km ²)	Urban (%)	Arable (%)	Wetland (%)	Natural-Mixed (%)
1	150000	3026.28	0.02	99.5	0.12	0.36
2	3140	35.79	38.31	59.28	0	2.41
3	550	23.72	0	98.53	0	1.47
4	4320	14.17	0	71.25	0	28.75
5	4030	11.48	0	85.71	0	14.29
6	2530	11.22	0	100	0	0
7	4880	28.19	4.6	85.58	0	9.82

8	1870	36.66	1.43	84.01	0	14.56
9	340	2455.98	70.48	26.87	0	2.65
10	10950	19.90	64.62	35.2	0	0.18
11	470	49.84	6.45	68.55	0	25
12	4020	10.65	0.38	92.97	0	6.65
13	600	507.07	0	66.67	0	33.33
14	1370	3.50	0	88.59	0	11.41
15	2310	12.83	0	50	0	50
16	1450	1.87	0	77.24	0	22.76
17	3330	12.25	0	68.75	0	31.25
18	830	21.53	59.78	17.14	0	23.08
19	1540	39.36	0	75	0	25
20	1780	4.91	94.41	2.11	0	3.48
21	550	70.28	80.95	17.46	0	1.59
22	2220	10.70	62.63	29.29	0	8.08
23	2865	8.69	100	0	0	0
24	1680	27.45	0.83	95.17	0.99	3.01

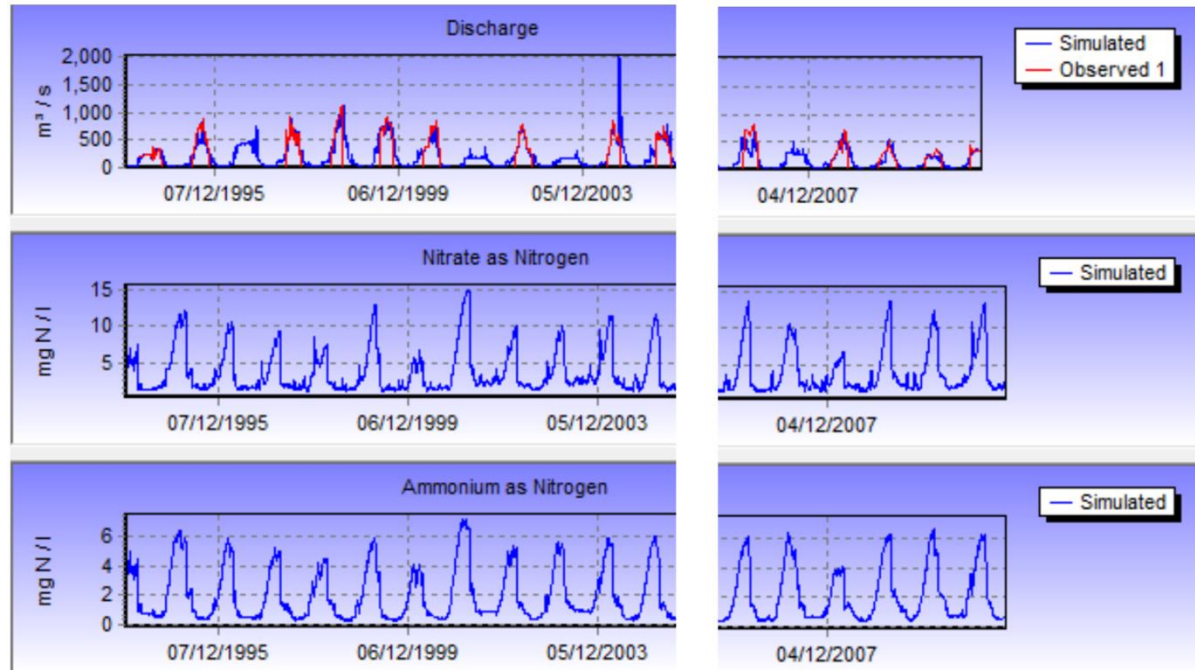


Figure 8 Simulated and Observed Flow in Reach 8 of the Turag Model and simulated Nitrate (as N) and Ammonia (as N) Concentrations. Left graph shows a flow calibration period and right graph show the flow validation period.

Table 2 Generic parameters for Turag-Tongi-Balu River system INCA-Total Coliform model

Parameter	Value
Land phase	
Soil water processes: Die-off rate	0.6 day ⁻¹
Soil water processes: Growth rate	0 day ⁻¹
Soil water processes: Light decay rate	0.1 day ⁻¹
Inputs: Manure: Manure addition rate: Arable	1E6 cfu/ha/day
Inputs: Animals: Animal addition rate: Arable	1.4E6 cfu/ha/day
Inputs: Animals: Animal addition rate: Urban	6E6 cfu/ha/day
Inputs: Animals: Animal addition rate: Natural-Mixed	1.4E6 cfu/ha/day
Direct runoff residence time	1.2 days
Soil water residence time	5.7 days
Water column	
Light decay proportionality constant	0.5
Decay rate	0.6 day ⁻¹
Growth rate	0 day ⁻¹
Sediment	
Shear velocity threshold for resuspension	0.005 m/s

Deposition rate	0.5 day ⁻¹
Resuspension rate	0.1 day ⁻¹
Growth rate	0 day ⁻¹
Decay rate	0.5 day ⁻¹
Physical attributes	
Base flow index	0.7

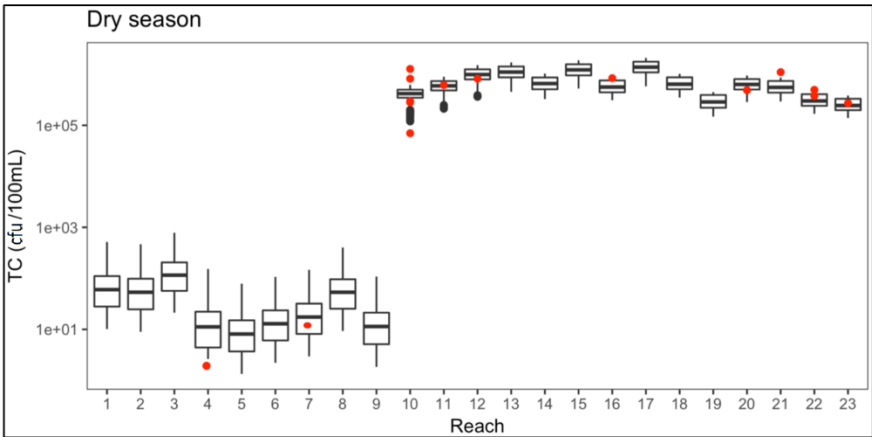


Figure 9 Comparison of modelled (boxplot) and observed (red dots) Total Coliform for the reaches of the Turag-Tongi-Balu River system. The first and third quartiles are represented by the lower and upper boxplot hinges, respectively. The median is represented by a line, and the upper and lower whiskers extend to the largest and smallest values, respectively, within 1.5 times the interquartile range of the upper and lower hinges.

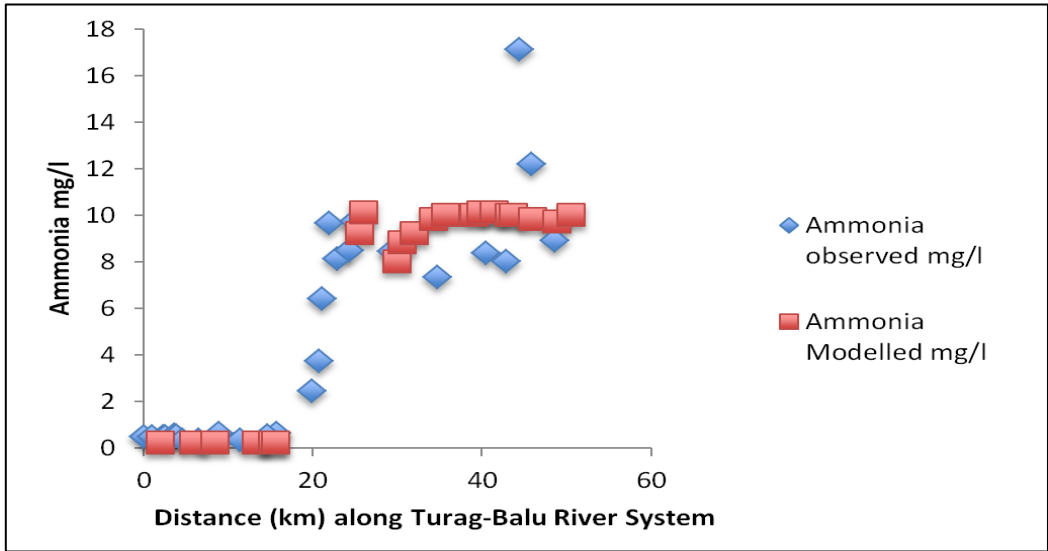


Figure 10 Mean Modelled and Observed Ammonia-N along the Turag-Tongi-Balu River System in the Dry period

RESTORATION MEASURES

Having established the INCA models for Total Coliforms and Ammonia-N, we can use the model setup to evaluate a series of management alternatives to address the serious pollution problems along the river system. Two management strategies have been considered in this study: the introduction of effluent clean up technologies for key discharges along the river, and the alteration of water flows in the upper Turag to increase the flows of water in low flow conditions. Figure 11 shows the effects of these strategies on the Ammonia-N concentrations along the river system, as well as what would happen if both were implemented together. With a modern effluent treatment plant it can be assumed that the ammonia concentrations could be reduced from 19 mg/l in the effluent discharges to 5mg/l, then this would result in a significant reduction in ammonia in the river system, as shown in Figure 11. Flow augmentation would involve creating a canal or link between the Brahmaputra and the upper Turag. Allowing an augmentation flow of 20 m³/sec during the dry period the dilution effects would be significantly enhanced, halving the Ammonia-N concentrations to approximately 6 mg/l (Figure 11). The best solution is to combine these policies, and this would reduce the ammonia levels to low concentrations of 1 to 2 mg/l. These two strategies would also reduce the concentrations of other pollutants such as BOD and COD, as well as metals and organics. This would therefore transform the river from being one of the most polluted in the world to being a safe river of average to good water quality with dissolved oxygen concentrations of 5-7 mg/l or at 80% saturation. This combined strategy would also prevent the anoxic conditions in the sediments preventing the release of metals into the water column and contribute to a reduction in noxious gas formation.

In terms of Total Coliform a similar set of conclusions can be drawn. The calibrated value of effluent Total Coliforms was 1×10^6 cfu/100ml. If waste were collected and treated in well-managed STWs, this discharge might be reduced and, as in the case of ammonia, the instream Total Coliform concentrations would be reduced. This would also be enhanced in the dry period with flow augmentation. As shown in Figure 12, the model results do indeed show that flow augmentation and improved effluent treatment will reduce Total Coliform counts in the Turag-Tongi-Balu River system. The darker blue boxes show the effects of full flow augmentation up 20 m³/sec and the x axis shows a set of simulations for the different effluent discharge concentrations. These combined effects have a significant impact, lowering the TC instream levels significantly. Thus the modelling shows that improved municipal effluent treatment and flow augmentation has the potential to provide significant reductions in Total Coliform counts. The changes in concentrations can also be assessed in terms of health hazards and to investigate the potential for improving health conditions of people living close to the river or using water from the river. The strategies proposed here to improve water quality will be expensive and their application is likely to be influenced by wider economic and political concerns.

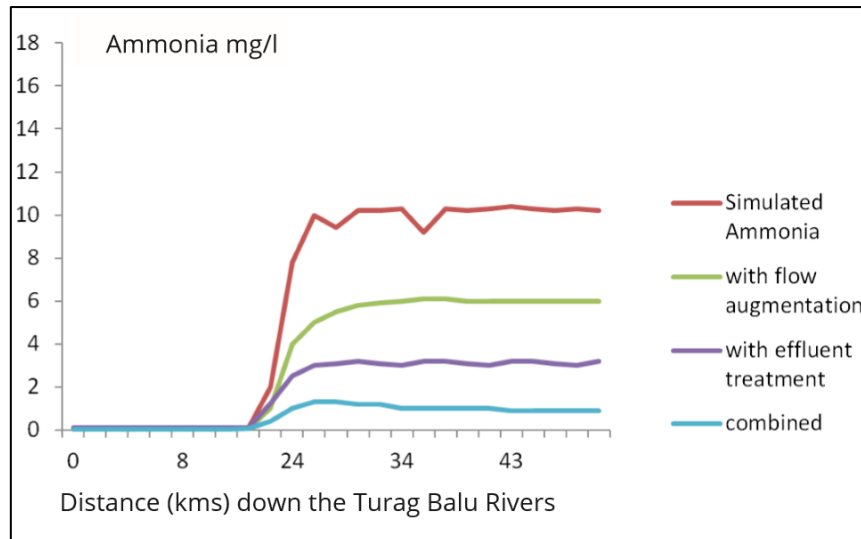


Figure 11 Simulated Ammonia-N on the Turag-Tongi-Balu System under scenarios of effluent treatment and flow augmentation

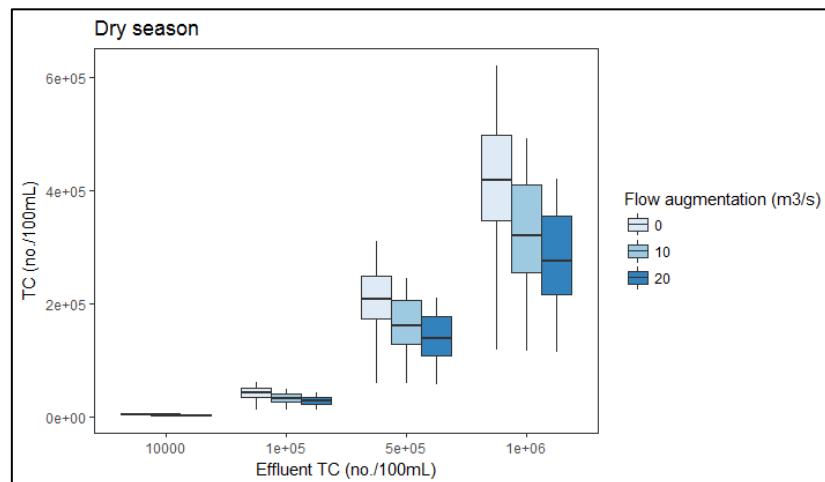


Figure 12 Modelled TC at reach 10 under 3 flow augmentation strategies (0 m³/s, 10 m³/s and 20 m³/s - shown as light blue to dark blue) and with sewage treatment imposed for effluent Total Coliforms of 1E+06 , 5E+05, 1E+05 and 1E+04 cfu/100ml, corresponding to a 0%, 50%, 90% and 99% reduction respectively

CONCLUSIONS

The INCA-N and Total Coliform models are able to simulate spatial and temporal patterns in ammonia, nitrate and Total Coliform along the Turag-Tongi-Balu River system. The scenario analyses indicate that improved effluent treatment and flow augmentation are likely to have a great impact on reducing pollutant levels in the river system. This combined strategy to reduce pollution and enhance the low flows is recommended. This approach also aligns with government policy. However the costs of new Sewage Treatment Works (STWs) plus the cost of canals or diversions to enhance summer flows upstream will be high. The model can be used to evaluate alternative designs such as the number, efficiency and location of STWs, the flows required by the canal, and hence canal size in order to evaluate the most cost effective solution. Improving water quality is a key priority for the government and a stronger evidence

base can help target the most beneficial investments for people, ecosystems and industry. Dissolved oxygen is a key indicator of ecosystems health and there is a strong need to significantly improve current DO levels to bring them back to internationally accepted ranges.

It should be noted that there are always limitations on studies of water quality and modelling in complex river systems. There is limited data available on the effluent discharges as many discharges are not monitored or measured, plus there are model uncertainties associated with parameterisation of the models. Again this is due to the lack of measurement but literature values of parameter and the extensive experience of applying INCA to over 50 catchments worldwide gives confidence that the model is representative of the river systems. Furthermore, the scenarios selected are just example evaluations of restoration strategies. Considerable additional work would be needed to evaluate the local details of an augmentation flow approach or the details treatment of discharged effluents.

This study has highlighted the role of mathematical modelling in low resource environments where data are both sparse and difficult to capture given the complexity and dynamic nature of the environmental, economic and political context. The rapid growth of Dhaka and the importance of new industries such as the garment industry which is generating over USD 25 billion per year is a key issue for Bangladesh. Such industries create work for mainly female workers lifting multiple more people out of poverty. However planned future growth to double such development by 2021 will depend on protecting the river to balance growth with environmental sustainability, human health and job creation.

ACKNOWLEDGEMENTS

This document is an output from the REACH programme funded by UK Aid from the UK Department for International Development (DFID) for the benefit of developing countries (Aries Code 201880). The research is part of the REACH 'Water security for an urban river' Observatory. This includes key stakeholders including the Government of Bangladesh's Department of Environment (DoE), GED under Planning Commission, WARPO, BWDB, DPHE and Bangladesh Water MSP (especially GDWR work stream), Dhaka University. We also acknowledge the support extended to REACH from JICA funded SATREPS project at BUET in river sampling, data sharing and analytical measurements.

We also acknowledges the support of the DECCMA Project on 'DEltas, vulnerability and Climate Change: Migration and Adaptation' which is part of Collaborative Adaptation Research Initiative in Africa and Asia (CARIAA), with financial support from the UK Government's Department for International Development (DfID) and the International Development Research Centre (IDRC), Canada.

The views expressed and information contained in this document are not necessarily those of or endorsed by DFID, which can accept no responsibility for such views or information or for any reliance placed on them.

REFERENCES

Bussi, G., P.G. Whitehead, A.R.C. Thomas, D. Masante, L. Jones, B.J. Cosby, B.A. Emmet, S.K. Malham, C. Prudhomme, H. Prosser. 2017. Climate and land-use change impact on faecal indicator bacteria in the River Conwy (Wales). *Journal of Hydrology*. 553, 248-261. doi:10.1016/j.jhydrol.2017.08.011.

421 Dentener, F.J., 2006. Global maps of atmospheric nitrogen deposition 1860, 1993, and 2050,
 422 data set, Oak Ridge National Laboratory Distributed Active Archive Center, Oak Ridge,
 423 Tennessee, USA. doi:10.3334/ORNLDAAAC/830

424 Dewan, A.M. and Yamaguchi, Y. (2009) Land Use and Land Cover Change in Greater Dhaka,
 425 Bangladesh: Using Remote Sensing to Promote Sustainable Urbanization. *Applied*
 426 *Geography*, 29, 390-401

427 Dewan, A.M., Yamaguchi, Y. and Rahman, M.Z. (2012) Dynamics of Land Use/Cover
 428 Changes and the Analysis of Landscape Fragmentation in Dhaka Metroplitan, Bangladesh.
 429 *GeoJournal*, 77, 315-330.<https://doi.org/10.1007/s10708-010-9399-x>

430 Hornberger, G. M. and Spear, R. C., 1980 Eutrophication in peel inletâ€l. The problem-
 431 defining behavior and a mathematical model for the phosphorus scenario, In *Water Research*,
 432 Volume 14, Issue 1, 1980, Pages 29-42, ISSN 0043-1354, [https://doi.org/10.1016/0043-](https://doi.org/10.1016/0043-1354(80)90039-1)
 433 [1354\(80\)90039-1](https://doi.org/10.1016/0043-1354(80)90039-1).

434 Islam, S., Ahmed, K., Al-Mamun, H., Masunaga, S., 2015. Assessment of trace metals in fish
 435 species of urban rivers in Bangladesh and health implications. *Environ. Toxicol. Pharmacol.*
 436 39, 347–357. doi:10.1016/j.etap.2014.12.009

437 Jin, L., Whitehead, P G, Sarkar, S., Sinha, R., Futter, M N, Butterfield, D, Caesar J., and
 438 Crossman J. , 2015, [Assessing The Impacts Of Climate Change And Socio-Economic](#)
 439 [Changes On Flow And Phosphorus Flux In The Ganga River System](#), *Environ. Sci.: Processes*
 440 [Impacts](#), 17, 1098-1110 , DOI: 10.1039/C5EM00092K

441 MoEF, 2010. Po l l u t i o n Abatement Stra t e g i e s for River s and Wetl a n d s in and Around
 442 Dhaka City, Parliamentary Standing Committee on Ministry of Environment and Forests
 443 (MoEF), Government of the People's Republic of Bangladesh, February 2010. Dhaka,
 444 Bangladesh

445 Nicholls, R.J., C.W. Hutton, A.N. Lázár, A. Allan, W.N. Adger, H. Adams, J. Wolf, M. Rahman,
 446 and M. Salehin. 2016. "Integrated assessment of social and environmental sustainability
 447 dynamics in the Ganga-Brahmaputra-Meghna delta, Bangladesh." *Estuarine, Coastal and*
 448 *Shelf Science* 183, 370-381. <http://dx.doi.org/10.1016/j.ecss.2016.08.017>

449 Pimentel, D., Cooperstein, S., Randell, H., Filiberto, D., Sorrentino, S., Kaye, B., Nicklin, C.,
 450 Yagi, J., Brian, J., O'Hern, J., Habas, A., Weinstein, C., 2007. Ecology of Increasing Diseases:
 451 Population Growth and Environmental Degradation. *Hum. Ecol.* 35, 653–668.
 452 doi:10.1007/s10745-007-9128-3

453 Prüss-Üstün, A. and Corvalán, C., 2006. Preventing disease through healthy environments.
 454 Towards an estimate of the environmental burden of disease. Geneva: World Health
 455 Organization.

456 Sabit, M. I. and Ali, A., 2015. Pollution of water bodies within and around Dhaka city: the Case
 457 of Gulshan lake, *Journal of Civil Engineering (IEB)*, 43 (1) (2015) 29-39

458 SHAHID, S. 2010. Rainfall variability and the trends of wet and dry periods in Bangladesh.
 459 *International Journal of Climatology*, 30, 2299-2313.

460 Spear RC and Hornberger GM, 1980 Eutrophication in the Peel Inlet II. Identification of critical
461 uncertainties via generalised sensitivity analysis. *Water Research* 1980;14:43 - 49.

462 Vörösmarty, C.J., McIntyre, P.B., Gessner, M.O., Dudgeon, D., Prusevich, A., Green, P.,
463 Glidden, S., Bunn, S.E., Sullivan, C.A., Liermann, C.R., Davies, P.M., 2010. Global threats to
464 human water security and river biodiversity. *Nature* 467, 555–561. doi:10.1038/nature09440

465 Wade, A .J., Durand, P., Beaujouan, V., Wessel, W. W., Raat, K. J., Whitehead, P. G.,
466 Butterfield, D., Rankinen, K. And Lepisto, A., 2002a Towards a generic nitrogen model of
467 European ecosystems: INCA, new model structure and equations. *Hydrol. Earth Syst. Sci.*, 6,
468 559-582.

469 Wade, A.J., Whitehead, P.G., Butterfield, D., 2002b. The Integrated Catchments model of
470 Phosphorus dynamics (INCA-P), a new approach for multiple source assessment in
471 heterogeneous river systems: model structure and equations. *Hydrology and Earth System*
472 *Sciences*, 6(3): 583-606.

473 Wade, A., Whitehead, P., Hornberger, G., Jarvie, H., Flynn, N., 2002c. On modelling the
474 impacts of phosphorus stripping at sewage works on in-stream phosphorus and
475 macrophyte/epiphyte dynamics: a case study for the River Kennet. *Science of the total*
476 *environment*, 282: 395-415.

477 WARPO 2004. National Water Management Plan. Dhaka, Bangladesh: Water Resources
478 Planning Organization.

479 Whitehead, P.G., Wilson, E., Butterfield, D., 1998a. A semi-distributed integrated nitrogen
480 model for multiple source assessment in catchments (INCA): Part I — model structure and
481 process equations. *Sci. Total Environ.* 210-211, 547–558. doi:10.1016/S0048-
482 9697(98)00037-0

483 Whitehead, P.G., Wilson, E., Butterfield, D., Seed, K., 1998b. A semi-distributed integrated
484 flow and nitrogen model for multiple source assessment in catchments (INCA): Part II —
485 application to large river basins in south Wales and eastern England. *Sci. Total Environ.* 210-
486 211, 559–583. doi:10.1016/S0048-9697(98)00038-2

487 Whitehead, P.G., Barbour, E., Futter, M.N., Sarkar, S., Rodda, H., Caesar, J., Butterfield, D.,
488 Jin, L., Sinha, R., Nicholls, R., Salehin, M., 2015. Impacts of climate change and socio-
489 economic scenarios on flow and water quality of the Ganga, Brahmaputra and Meghna (GBM)
490 river systems: low flow and flood statistics. *Environ. Sci. Process. Impacts* 17, 1057–1069.
491 doi:10.1039/c4em00619d

492 Whitehead, P. G., Leckie, H., Rankinen, K., Butterfield, D., Futter, M. N. & Bussi, G. 2016. An
493 INCA model for Total Coliform in rivers and catchments: Model structure, sensitivity analysis
494 and application to the River Thames catchment, UK. *Science of The Total Environment*, 572,
495 1601-1610.

496 Yatagai, A., Kamiguchi, K., Arakawa, O., Hamada, A., Yasutomi, N. and Kitoh, A., 2012.
497 APHRODITE: Constructing a long-term daily gridded precipitation dataset for Asia based on
498 a dense network of rain gauges. *Bulletin of the American Meteorological Society*, 93(9),
499 pp.1401-1415.

